

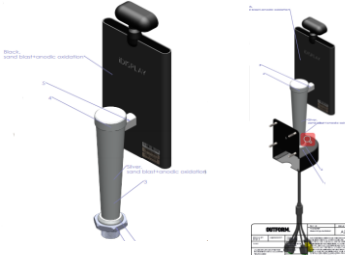







Difference		Generation 1 UITH108-B01	Generation 3 UITH108-B03
Structure	Front View		
	Back View		
	Side View		
	USB Port at the bottom of Tablet	USB Type A 	Mini USB 
System	Internal Memory	8GB	16GB
	Operation System	Android 5.1	Android 8.1
Function	Email/Text notification	X	✓
	Printer for Ticket	✓	✓
	Server	X	✓
	Monitoring System	X	✓
	Optimum Detection Distance	40-60cm	30-50cm
	Optimum Temperature Range for Measurement	35-43°C	30-45°C
Cables	Cables for the Base	DC x 1 USB X1 RJ45 x 1 Relay x 1 Wiegand IN x 1 Wiegand OUT x 1	DC x 1 USB X1 RJ45 x 1 Relay x 1 Wiegand x 1 GPIO x 1 (2 channels)