

CITY TOTEM

Ideal for Town Centre Advertising Displays & Community Messaging

SCREEN SIZES:

55" & 75"

- ✓ IP65 Outdoor Rated
- ✓ Temperature Controlled
- ✓ 3500NIT High Bright Display
- ✓ 24/7 Commercial Use



**MADE IN
BRITAIN**

**3 Years
Warranty**



55" & 75" Models

Incredibly sleek, stylish and slim yet extremely visible with a choice of sizes; 55" & 75", both with a high bright 3500Nit display. Designed to stand out in busy high street and commercial environments.

304 Stainless Steel Body & Grained Powered Coated Finish

Custom finish choice of RAL Colours or Stainless Steel. 5 YR - Anti-Rust and Corrosion warranty, giving you peace of mind they will last the test of time.





LCD Air Curtain Cross Blower Fan

Fans & Tangential Cross Blowers provide an LCD Air-Curtain keeping the hi-bright Display nice and cool for the sunniest days.





UV Protected with 3M™ Sun Control Film



Tempered Glass is protected with 3M™ Sun Control film, which rejects up to 97% of sun's infrared light and blocks up to 99.9% of harmful ultraviolet (UV) rays. Preventing Screen Blackening & Failure.

Features

-  IP65 Rated Enclosure
-  Air-cooled & Temperature Controlled
-  Ultra Hi-bright 2500 cd/m² Screen
-  24/7 Commercial Use

Available Add-ons

-  3G or WI-FI Antenna
-  Windows or Android Media Player
-  3M Sun Control Film
-  Custom RAL Painted Finish and Branding

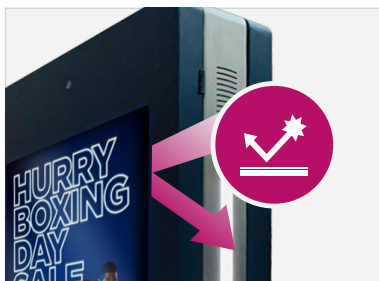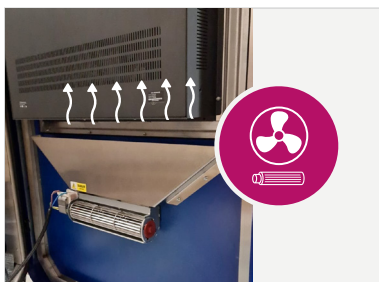

Other Features

RCD Protected for Electrical & Equipment Safety

All of our outdoor screen range are fitted with a 30mA RCD that protects users and equipment if an electrical fault was ever to occur. If an electrical fault was detected the switch will disconnect power within 40 NanoSeconds.



Custom RAL Power Coat & Finish

All of our Outdoor Screen Enclosures are proudly Made in Britain, meaning we are able to keep lead times short and offer a bespoke service. We are able to custom fabricate based on requirements and powder coat our enclosures to your brand ral or finish.



Impact Resistant & Vandalism Safe With 6mm Toughened Glass

Protected by 6mm Laminated & Toughened Glass you can have peace of mind installing our Outdoor Screen Enclosures into public spaces.




3500NIT OEM High Bright Panel backed by 3YR Warranty

Our Ultra High Bright OEM Panel boasts an impressive 3500nit Brightness that will always be sunlight readable whatever the location. You have peace of mind that the solution will last thanks to the 3 Year Warranty.



Optional Air Cooler Upgrade for Hotter Climates

Upgrade the City Totem with a Termotek Air Cooler for Hotter Climates. Compatible with both 55" and 75" models the air conditioning unit fits into the existing design, keeping internal temperatures stable and stopping component burn out.

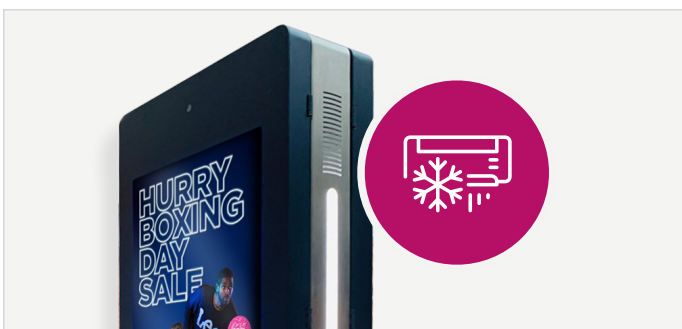

Fully Guaranteed Solution MADE IN BRITAIN

Fully backed by a Made In Britain manufacturer you can have peace of mind thanks to a 3 Year Warranty against mechanical or electrical failure and a further 5 Year Stainless Steel guarantee against rust and corrosion. UK remote technical support packages are also available.





LCD Control Features

- High Brightness Controller
- On Screen Menu
- No Signal Power Off
- No Signal Screen Saver
- Auto Source Switch
- Remote Controller
- Device Control over RS232
- Device Control over LAN
- HDMI IN
- RS232
- USB

The Inner & outer of display is manufactured from **Grade 304 Stainless Steel**, with a choice of finish, grained Polished, or RAL colour textured powder coat, guaranteed 5 years, not to fade and no rust.



Specification

	Size	55"	75"
Panel Details	Brightness (Cd / M2)	3500	3500
	Panel Type	α-Si TFT-LCD (LG LCD Panel)	α-Si TFT-LCD (LG LCD Panel)
	Resolution	1920 x 1080 (16:9) - FHD	1920 x 1080 (16:9) - FHD
	Contrast Ratio	1200:1	1200:1
	Dynamic Contrast Ratio	250000:1	250000:1
	Panel Life Time (Min.)	50,000 H	50000 H
	Backlight Type	DIRECT TYPE LED	DIRECT TYPE LED
	Response Time (typical)	6 ms	6 ms
	Refresh Rate	120 Hz	120 Hz
AV Inputs	Video	HDMI,VGA, DVI	HDMI,VGA, DVI
Power	Power Consumption (W)	290 W	320 W
	Input Voltage	AC 100-240V, 50-60 Hz	AC 100-240V, 50-60 Hz
Mechanical	Unit Size (HxWxDmm)	2375H x 900W x 350D X 217H Base	2375H X 1395W x 350D x 217H Base
	Package Size(HxWxDmm)	Pallet Size VERTICAL DELIVERY	Pallet Size VERTICAL DELIVERY
	Net Weight(kg)	265 kg	295 kg
	Gross Weight(kg) (with base)	305 kg	339 kg
Environmental	Operating Temperature	0°C ~ 50°C	0°C ~ 50°C
	Storage Temperature	-20°C ~ 60°C	-20°C ~ 60°C
	Operating Humidity	-30°C to 60°C	-30°C to 60°C
	Storage Humidity	10% to 80%	10% to 80%
	Regulatory Approvals	CE, FCC, ROHS, HDMI	CE, FCC, ROHS, HDMI